
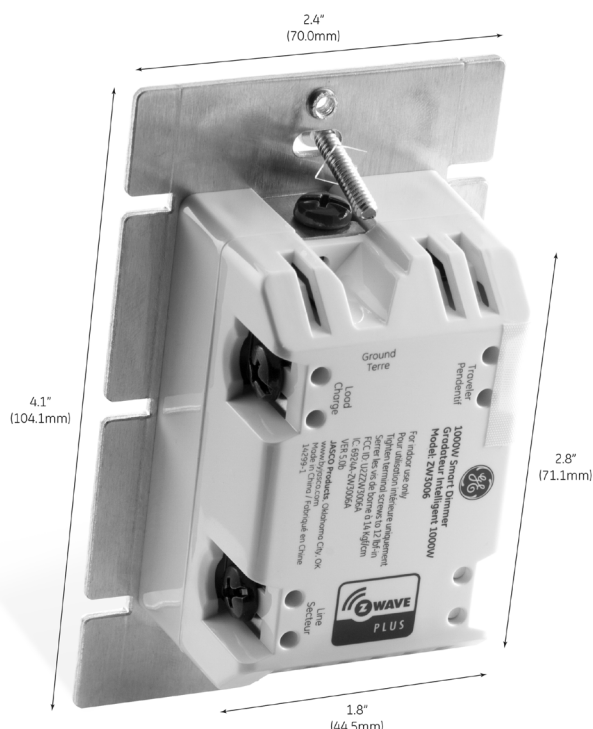


# GE Z-Wave In-wall 1000W Smart Dimmer

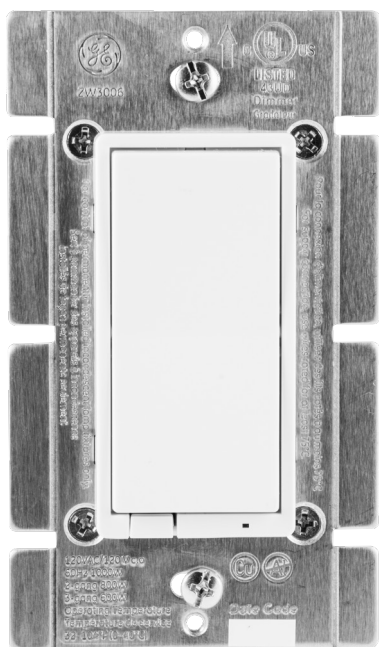

## Specifications

**Power:** 120VAC, 60Hz **Signal Frequency:** 908.4/916

**Maximum Load:** 1000W Incandescent, 2-gang 800W, 3-gang incandescent lamps only

**Range:** Up to 150 feet from controller or closest Z-Wave device

**Operating Temperature:** 32-104° F (0-40° C)

**Warranty:** 2-year limited product warranty

**Requires neutral wire. Switch must be mounted indoors**


## Design Features

- Remotely monitor with any mobile device\*
  - Turn ON/OFF and control the brightness level of the connected lighting manually or via Z-Wave remote control.
  - May be used in single pole installation or with up to four GE model 12723 Add-on switches in 3, 4, 5 or 6-way wiring configurations
  - UL Listed works with high-output, halogen and incandescent bulbs
  - Blue LED indicates switch location in a dark room
  - Can be Included in multiple Groups and Scenes
  - OTA Updateable Utilizes the Z-Wave Firmware Update Meta Data command class for standardized firmware updates Over the Air
  - Supports Advanced Configuration; Dim rates, LED status, Invert switch (if unit is installed upside down)
  - Screw Terminal installation; requires wiring connections for Line (Hot), Load, and Ground. Traveler wire required for multi pole installation
  - Full Range Dimmability; adjust brightness level from 0-100% in 1% increments
- Use a standard-size wall plate for single gang installations (wall plate not included); Multi-gang box option available (removable 'side wings')
  - Interchangeable Paddle switch: White & light almond paddle included in package
    - LED status can be inverted
    - Inline traveler circuit protection
    - Z-Wave Plus Certified



## Z-Wave Plus Features

- Works with Z-Wave Classic and Z-Wave Plus Products
- 50% more wireless range
- 250% faster processor
- 400% more memory
- 50% more energy efficient
- Supports wireless upgrades to future-proof your home

## White/light almond paddles included



## Space-Saving Screw Terminals

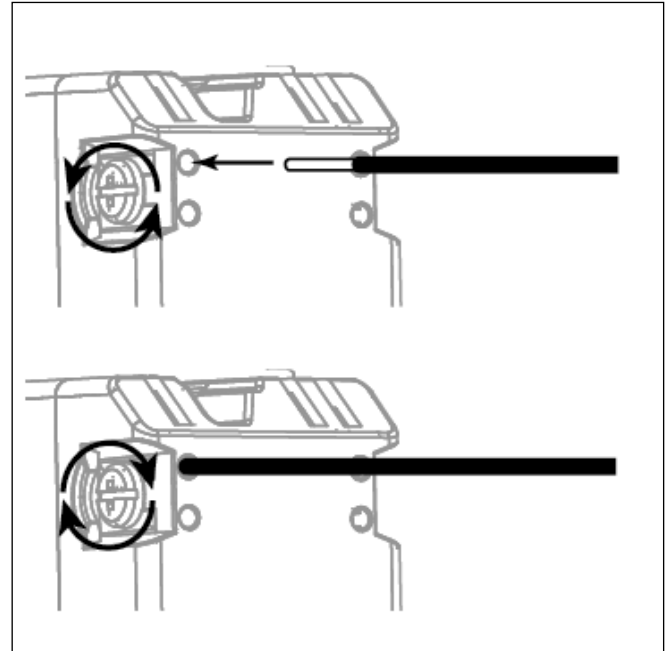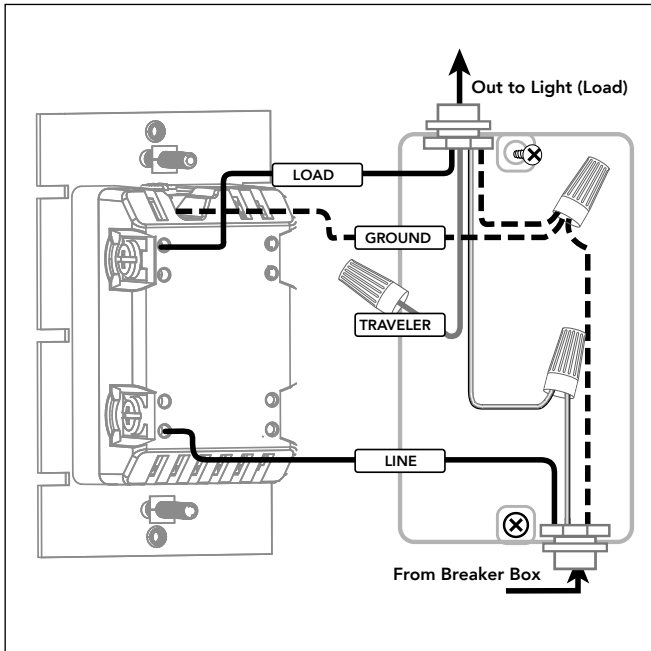

**Line Switch (Primary Switch)**

**Load Switch (Add-On Switch)**

- Devices require a 1-gang U.S. wall box. 3½ in deep recommended, 2¼ in deep minimum.
- Indoor use only
- Visit <http://www.ezzwave.com/hubs/> for hub compatibility
- Wallplates sold separately
- Trilingual Instruction manual – (English, French, Spanish)

## Device Configuration

### Adding your device to a Z-Wave network

Once the hub is ready to add your smart dimmer, press and release the top or bottom button on the smart dimmer to include it in the network.

### To remove and reset the device

Once the controller is ready to remove your device, press and release the top button on the smart dimmer to remove it from the network.

### To return to factory defaults

Quickly press the ON button 3 times, then press the OFF button 3 times. The LED will flash ON/OFF 5 times when completed successfully.

## Certifications & Compliances




Compliances, specifications and availability are subject to change without notice

Distributed by Jasco Products Company LLC  
10 E. Memorial Rd., Oklahoma City, OK

©Jasco 2018

## Related Products - GE Z-Wave In-Wall Smart Controls



**12723**  
Add-On  
Switch



**14291**  
In-Wall  
Smart Switch



**26931**  
In-Wall Smart  
Motion Switch



**26933**  
In-Wall Smart  
Motion Dimmer



**14288**  
In-Wall  
Smart Outlet

## Additional Paddle Colors



**13940**  
Black Paddle



**13943**  
Brown Paddle



**13945**  
Ivory Paddle