

# GE Z-Wave Plug-In Smart Switch



## Specifications

**Power:** 120VAC, 60Hz **Signal Frequency:** 908.4/916

**Maximum load for the Z-Wave controlled outlet:**

600W (5A) Incandescent / 1/2 HP Motor or

1800W (15A) Resistive. Z-Wave controlled outlet is fused @ 5A.

This fuse is not user serviceable

**Range:** Up to 150 feet from controller or closest Z-Wave device

**Operating Temperature:** 32-104° F (0-40° C)

**Warranty:** 2-year limited product warranty

**For Indoor Use Only**


## Design Features

- Turn the connected device On/Off manually via Z-Wave remote control
- Remotely monitor with any mobile device\*
- Can be Included in multiple Groups and Scenes
- One Z-wave controlled AC outlet
- Remote ON/OFF control via the Z-Wave controller
- Manual ON/OFF control with the top push-button
- Space efficient design
- Does not block the lower outlet when plugged in to the upper outlet of a duplex wall receptacle. (This assumes that the duplex receptacle is mounted with the ground pin down.)
- Plugs and cords for connected devices route to the side allowing close placement of furniture
- Utilizes the Z-Wave Firmware Update Meta Data command class for standardized firmware updates Over the Air
- Z-Wave Plus certified
- Visit <http://www.ezwave.com/hubs/> for hub compatibility
- Trilingual Instruction manual – (English, French, Spanish)

## Z-Wave Plus Features

- Works with Z-Wave Classic and Z-Wave Plus Products
- 50% more wireless range
- 250% faster processor
- 400% more memory
- 50% more energy efficient
- Supports wireless upgrades to future-proof your home

\* Requires Z-Wave hub or controller, functions may vary depending on brand.

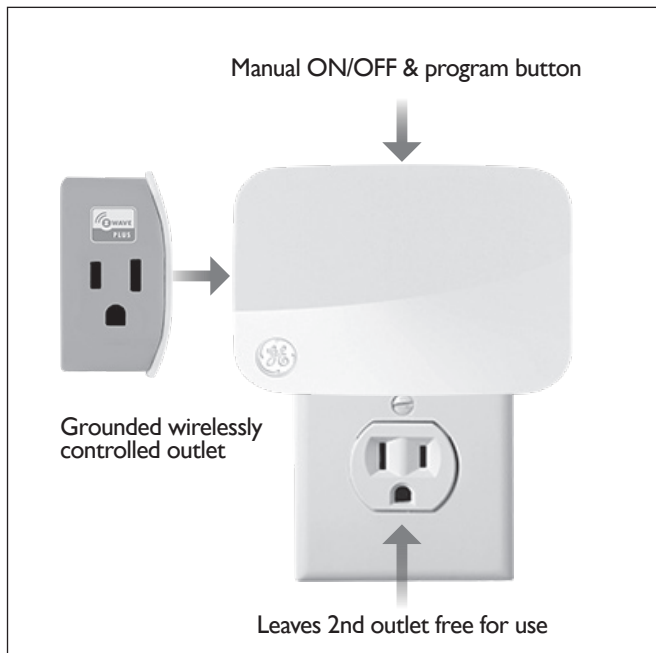

### Device Configuration

#### Adding your device to a Z-Wave network

Once the hub is ready to add your smart switch, press and release the top button on the smart switch to add it in the network.

#### To remove and reset the device

Once the controller is ready to remove your device, press and release the top button on the smart switch to remove it from the network.

#### To return to factory defaults

If plugged in, unplug from the receptacle. Press and hold the top button for at least 3 seconds while you plug the switch into the receptacle.

### Certifications & Compliances



Compliances, specifications and availability are subject to change without notice

Distributed by Jasco Products Company LLC  
10 E. Memorial Rd., Oklahoma City, OK

©Jasco 2018

### Related Products - GE Z-Wave Plug-In Smart Controls



**28167**  
Plug-In Smart Dimmer



**14282**  
Plug-In Dual Outlet Smart Switch



**14280**  
Plug-In Dual Outlet Smart Dimmer



**28177**  
Plug-In Dual Outlet Smart Switch with USB Charging



**28175**  
Plug-In Dual Outlet Smart Dimmer with USB Charging



**14284**  
Plug-In Outdoor Smart Switch