

GE Z-Wave Plug-In Outdoor Smart Switch



Specifications

Power: 120VAC, 60Hz **Signal Frequency:** 908.4/916

Maximum load for the Z-Wave controlled outlets:

Maximum load for the Z-Wave controlled outlet: 600W (5A)
Incandescent / 1/2 HP Motor or 1800W (15A) Resistive
Z-Wave controlled outlet is fused @ 5A. This fuse is not
user serviceable

Range: Up to 150 feet from controller or closest Z-Wave device

Operating Temperature: 32-104° F (0-40° C)

Warranty: 2-year limited product warranty

For outdoor or indoor use

Design Features


- Turn the connected device On/Off manually via Z-Wave remote control
- Remotely monitor with any mobile device*
- Can be Included in multiple Groups and Scenes
- One Z-Wave remote controlled AC outlet
- Remote ON/OFF control via the Z-Wave controller
- Manual ON/OFF control with the pushbutton
- Weather and impact resistant housing; Suitable for use outdoors in damp or wet conditions
- Includes outdoor mounting hardware
- Utilizes the Z-Wave Firmware Update Meta Data command class for standardized firmware updates Over the Air
- Integrated outlet cover keeps dirt & debris out when the module is not in use
- Z-Wave Plus Certified
- Black color
- Visit <http://www.ezwave.com/hubs/> for hub compatibility
- Trilingual Instruction manual – (English, French, Spanish)

Z-Wave Plus Features

- Works with Z-Wave Classic and Z-Wave Plus Products
- 50% more wireless range
- 250% faster processor
- 400% more memory
- 50% more energy efficient
- Supports wireless upgrades to future-proof your home

* Requires Z-Wave hub or controller, functions may vary depending on brand.



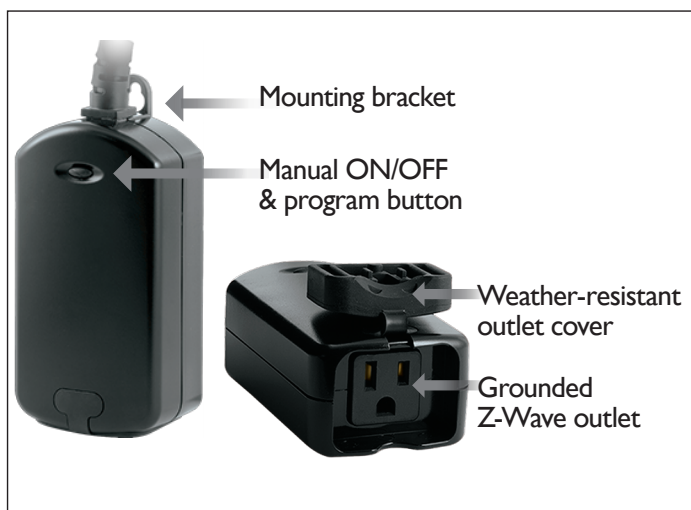

Device Configuration

Adding your device to a Z-Wave network

Once the hub is ready to add your smart switch, press and release the top button on the smart switch to add it in the network.

To remove and reset the device

Once the controller is ready to remove your device, press and release the top button on the smart switch to remove it from the network.

To return to factory defaults

If plugged in, unplug from the receptacle. Press and hold the top button for at least 3 seconds while you plug the switch into the receptacle.

Certifications & Compliances



Compliances, specifications and availability are subject to change without notice

Distributed by Jasco Products Company LLC
10 E. Memorial Rd., Oklahoma City, OK

©Jasco 2018

Related Products - GE Z-Wave Plug-In Smart Controls



28169
Plug-In Smart
Switch



28167
Plug-In Smart
Dimmer



14282
Plug-In Dual
Outlet Smart
Switch



14280
Plug-In Dual
Outlet Smart
Dimmer



28177
Plug-In Dual
Outlet Smart
Switch with
USB Charging



28175
Plug-In Dual
Outlet Smart
Dimmer with
USB Charging