


# GE Z-Wave Hinge Pin Smart Door Sensor

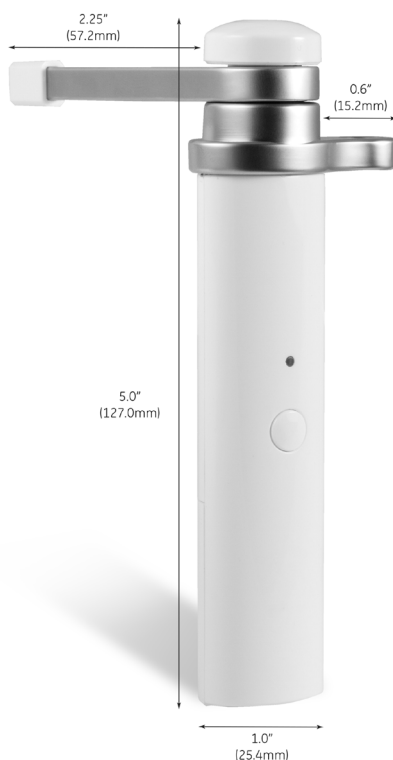

## Specifications

**Power:** 1 x CR2 Battery

**Signal Frequency:** 908.4/916

**Range:** Up to 150 feet from controller or closest Z-Wave device

**Operating Temperature:** 32-104° F (0-40° C)

**Warranty:** 2-year limited product warranty

**For indoor use only.**

## Design Features

- Adjustable for left and right opening doors
- Adjusts to fit door trim to avoid false triggering
- Fits up to 5/16" removable hinge pin diameter
- Molded color scuff resistant tip avoids wear marks on door
- Can be mounted to bottom hinge for maximum concealment

- **Remote Monitoring\***  
Monitor doors from a distance with smartphones or tablets

- **Trigger Automations**  
Activate scenes or lights when door is opened or closed

- **Sends Alerts**  
Be notified when activity is detected

- **Color-Matching Kits Available**  
Paintable/Silver/Dark Brown

- **OTA (Over-the-Air)**  
Updateable Utilizes the Z-Wave Firmware Update Meta Data command class for standardized wireless firmware updates

- Visit <http://www.ezwave.com/hubs/> for hub compatibility

- Trilingual Instruction manual – (English, French, Spanish)

## Z-Wave Plus Features

- Works with Z-Wave Classic and Z-Wave Plus Products
- 50% more wireless range
- 250% faster processor
- 400% more memory
- 50% more energy efficient
- Supports wireless upgrades to future-proof your home

\* Requires Z-Wave hub or controller, functions may vary depending on brand.



## Device Configuration

### Adding your device to a Z-Wave network

Once the hub is ready to add your smart door sensor, press and release button on the smart door sensor to add it in the network.

### To remove and reset the device

Once the controller is ready to remove your device, press and release the button on the smart door sensor to remove it from the network.

### To return to factory defaults

Press the button 10 times quickly. LED will blink approximately 8 times to signal a successful reset.

## Certifications & Compliances



Compliances, specifications and availability are subject to change without notice

Distributed by Jasco Products Company LLC  
10 E. Memorial Rd., Oklahoma City, OK

©Jasco 2018

## Related GE Z-Wave Products



**34193**  
Portable Smart  
Motion Sensor



**35931**  
Smart LED  
Bulb



**26931**  
In-Wall Smart  
Motion Switch



**26933**  
In-Wall Smart  
Motion Dimmer



**35260**  
Silver



**35257**  
Paintable



**35259**  
Dark Brown

## Color Matching Kits